

Crest Regal Blend Bricks - Pallet of 540no

Our Ref: 18610

Price : £114.00 inc VAT.

Website : [Click here to view this item on our website](#)

If you have any questions please do not hesitate to contact us

AINSCOUGH METALS

www.ainscoughmetals.co.uk 01942 820144



AINSCOUGH METALS

www.ainscoughmetals.co.uk 01942 820144









Regal Blend

size
65mm

compressive strength
 $\geq 20\text{N/mm}^2$

water absorption
 $\leq 15\%$

durability
FL / F2


weight per pack
65mm: 1100kg

pack size
65mm: 540

active soluble salts content
S2

dry weight per brick
2.0kg

dimensional tolerances
T1 Range Category R1

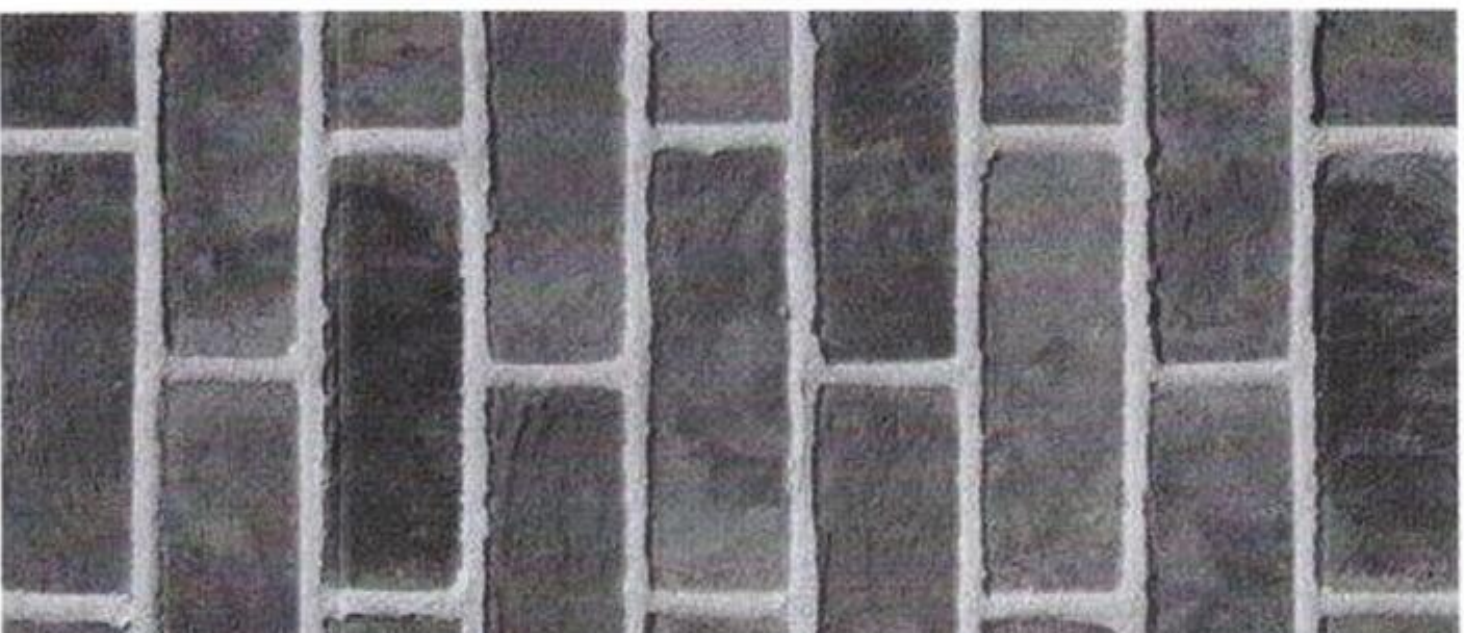













AINSCOUGH METALS

www.ainscoughmetals.co.uk

01942 820144





(91)2207061033



2510

Klinkerwerke H. W. Muhr GmbH & Co. KG
Fackeldeystraße 80 – 100
46446 Emmerich am Rhein

06

2510 – CPR – 311

EN

U – units
215 x 102.5 x 65 mm

Units for use in unprotected masonry walls, columns and partitions

Declaration of Performance code: B.1

Dimensional	Mean	Class T1 [mm]	length + - 6 width + - 4 height + - 3
	Range	Class R1 [mm]	length 9 width 6 height 5
Configuration			Form b)
Compressive strength (Mean) horizontal joint			$\geq 20 \text{ N/mm}^2$
Bond strength, Tabulated value see attachment C			0.15 N/mm^2
Active soluble Salts			Class S2
Reaction to fire			Euro Class A1
Water absorption			$\leq 15 \text{ M.} - 1\%$
Water vapour permeability			$\mu = 5/10$
Gross dry density (Mean)			1600 kg/m^3 , Deviation: Class D1 (10%)
Net dry density (Mean)			1800 kg/m^3 , Deviation: Class D1 (10%)
Durability / Freeze resistance class			F2 (DIN EN 772-22)
Dangerous substances			According to ZA.3

additional manufacturer's DIN 20401 data.

Class compressive strenght	12	geprüfte Qualität DIN EN 771-1  Produktionsstätte Klinkerwerke H. W. Muhr GmbH & Co. KG Fackeldeystraße 80-100 46446 Emmerich am Rhein	 IKB1758 Produktionsstätte
Class gross density	1,6		
Active soluble Salts	Class S3		
name of brick	Verbl. BS 13 Regal Blend		
product — number	813 / 0108R13UK		

